VoIP Business Touchscreen Phone System & Service

with Monitoring and Door Strike Control

View multiple cameras from one screen

Open doors remotely with the touchscreen

RCA's VoIP business deskphone and Axis IP cameras make it possible to monitor your office and have door strike capabilities, all from your desk.

- Monitor multiple locations with one view
- Activate door strike with one touch right from your office phone
- Leverage your existing data network
- Supports up to 16 different IP cameras
- Multiple videos per screen
- Intuitive use with the touchscreen

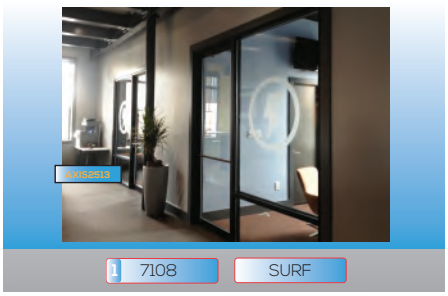

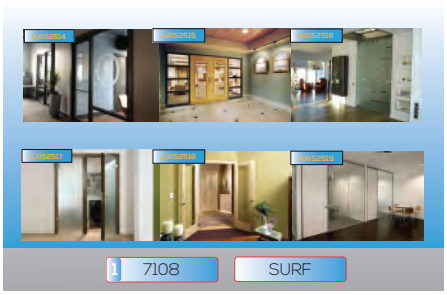

INTERMEDIA

Hosted PBX

- only **$27.99** per month.
- Free unlimited local and long distance (US)
- No contract required
- Auto attendant, music-on-hold, conferencing, transfer, hunts groups and much more
- 24x7 support from Intermedia
- No onsite PBX to manage

RYIP150S with monitoring and door strike control for your office

VoIP Business Touchscreen Telephone

RYIP150 Technical Specifications

Features	
Digital/Analogue	Digital
Max # of SIP Accounts	6
Max # of simultaneous calls	2
Base Speakerphone	Yes
Speakerphone Volume Control	Yes
Display Touchscreen	Capacitive
Base Keypad	Yes
Backlit Keypad	Yes
Display Brightness Adjustment	Yes
Multilangual display	Yes
Call Conferencing	3 way
Call Timer	Yes
Call Transfer	Yes
Do Not Disturb Feature	Yes
Hold	Yes
Voicemail	Through Provider
VIP Ringtones	Yes
Hearing Aid Compatible	Yes
Mute	Yes
Ringer Control	Yes
Selectable Ringtones	Yes
Importable Ringtones	Yes
Visual Ringer	Yes
Intercom	Yes
Phonebook/Directory Memory	Yes
Phonebook sync	Outlook® & Gmail™
Caller ID	Yes
Caller ID Memory	Yes
Caller ID Review & Delete	Yes
Automatic Date and Time set	Through Provider
Headset Jack	2.5mm

Hardware/Software Specifications	
Display	"7" Capacitive Touch Panel, 800 x 480 pixel resolution
Processors	TI OMAP3530 720 MHz Applications processor, Audio Codecs AC494 165 MHz VoIP processor
Ports and slots	Two RJ-45 Ethernet ports, 2.5mm Headset Jack
Memory	OMAP:1GB DRAM, AC494:256 MB DRAM
Storage	OMAP: 4GB NAND Flash, AC494:128MB NOR Flash
SIP Interoperability	Broadsoft™, Metaswitch™, Asterisk™ & Elastix® certified
Echo Cancellation	G.168-2002 compliant;Full duplex acoustic echo canceling
Quality Enhancement	Voice Activity Detection (VAD),Comfort Noise Generation (CNG),Pacjet Loss Concealment (PCL)
Jitter Buffer	Adaptive up to 300msec
Signaling	DTMF TIA 464B,User Defined tones
RTP/RTCP/SRTP	RFC 3350,RFC 3351,RFC 2198, and Secured RTP
DTMF Relay	Per RFC 2833
Programmable Keys	0
RTP Payload Encryption	128 bit AES,Authentication - MMH-MAC, HMAC MD5 and HMAC SHA1
LAN	Bridge/Router Dual 10/100 switched Ethernet; fixed/dynamic IP;HTTPS or TFTP for configuration files
PSTN	No
HD Codec	Yes

HD Voice	Handset
Speakerphone	Full Duplex
Codecs	G.711 u-law, G.711 A-law, G.722, G.722 Mode 1, G.722 Mode 2, G.722 Mode 3, G.722.1 24kbps, G.722.1 32kbps, G.723.1, G.729AB
Console UI	Android™ 2.3, Cloud Telecomputing Glass IP Phone Platform
Web UI	Android Webkit-based browser
Localized Language	Yes
BLF/BLA	Yes
XML Screen Browser	Yes
XML Phone Book	Yes
Specifications	
Desk or Wall mountable	Desk Only
Power Requirements	
Color/Packaging	Silver & Black/Giftbox
Dimensions	
Handset	7.64 x 1.9 x 1.93 inch
Base	10.51 x 8.73 x 2.71 inch
Giftbox	13.39 x 9.96 x 4.25 inch
Mastercarton	13.58 10.55 14.33 inch
Giftboxes in Mastercarton	3
Weight	
Product	3.01 lbs
In giftbox	4.19 lbs
Mastercarton	13.6 lbs
UPC Code	

Certifications

BROADSOFT elastix CERTIFIED HARDWARE Asterisk Metaswitch

Photos & features subject to change without notice
Illustration may vary from actual product
Warranty details available from local delaer

©2013 All rights reserved